





Birač kanala

MF pojačavač

Detektor

Detektor tona


NF pojačavač tona

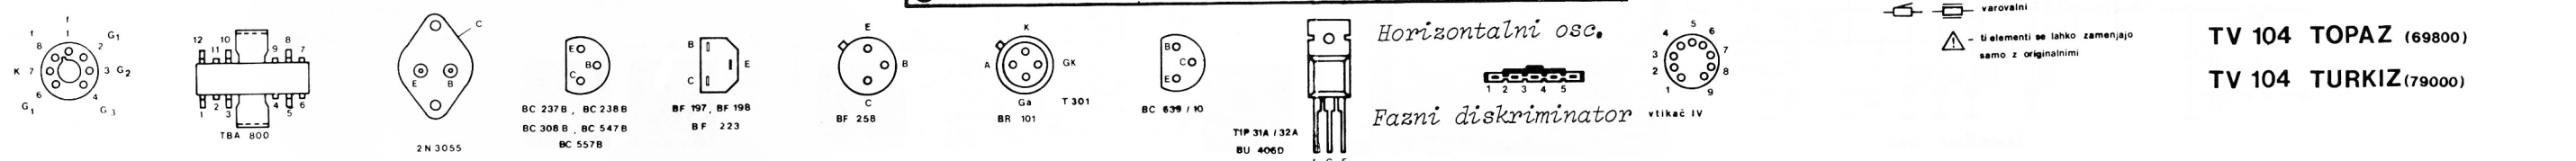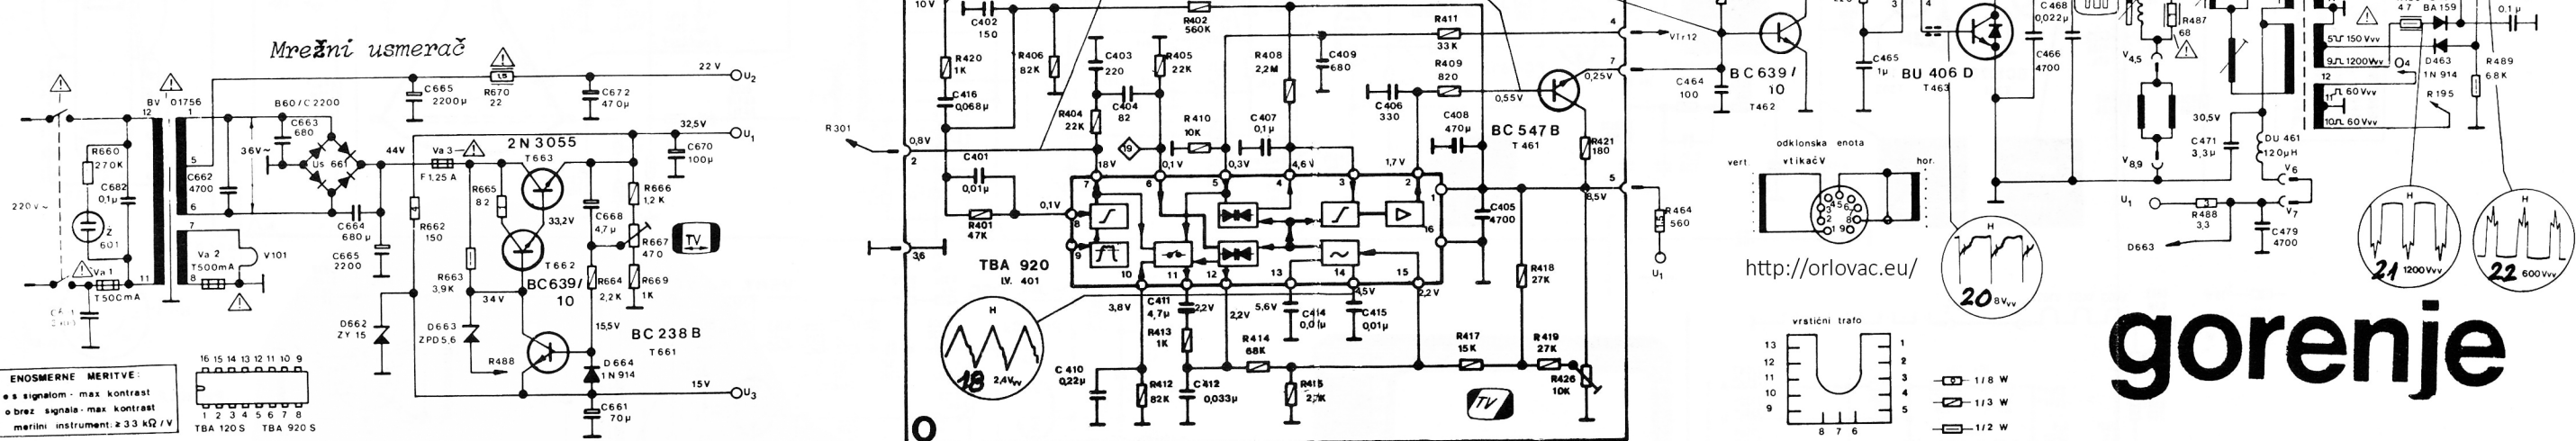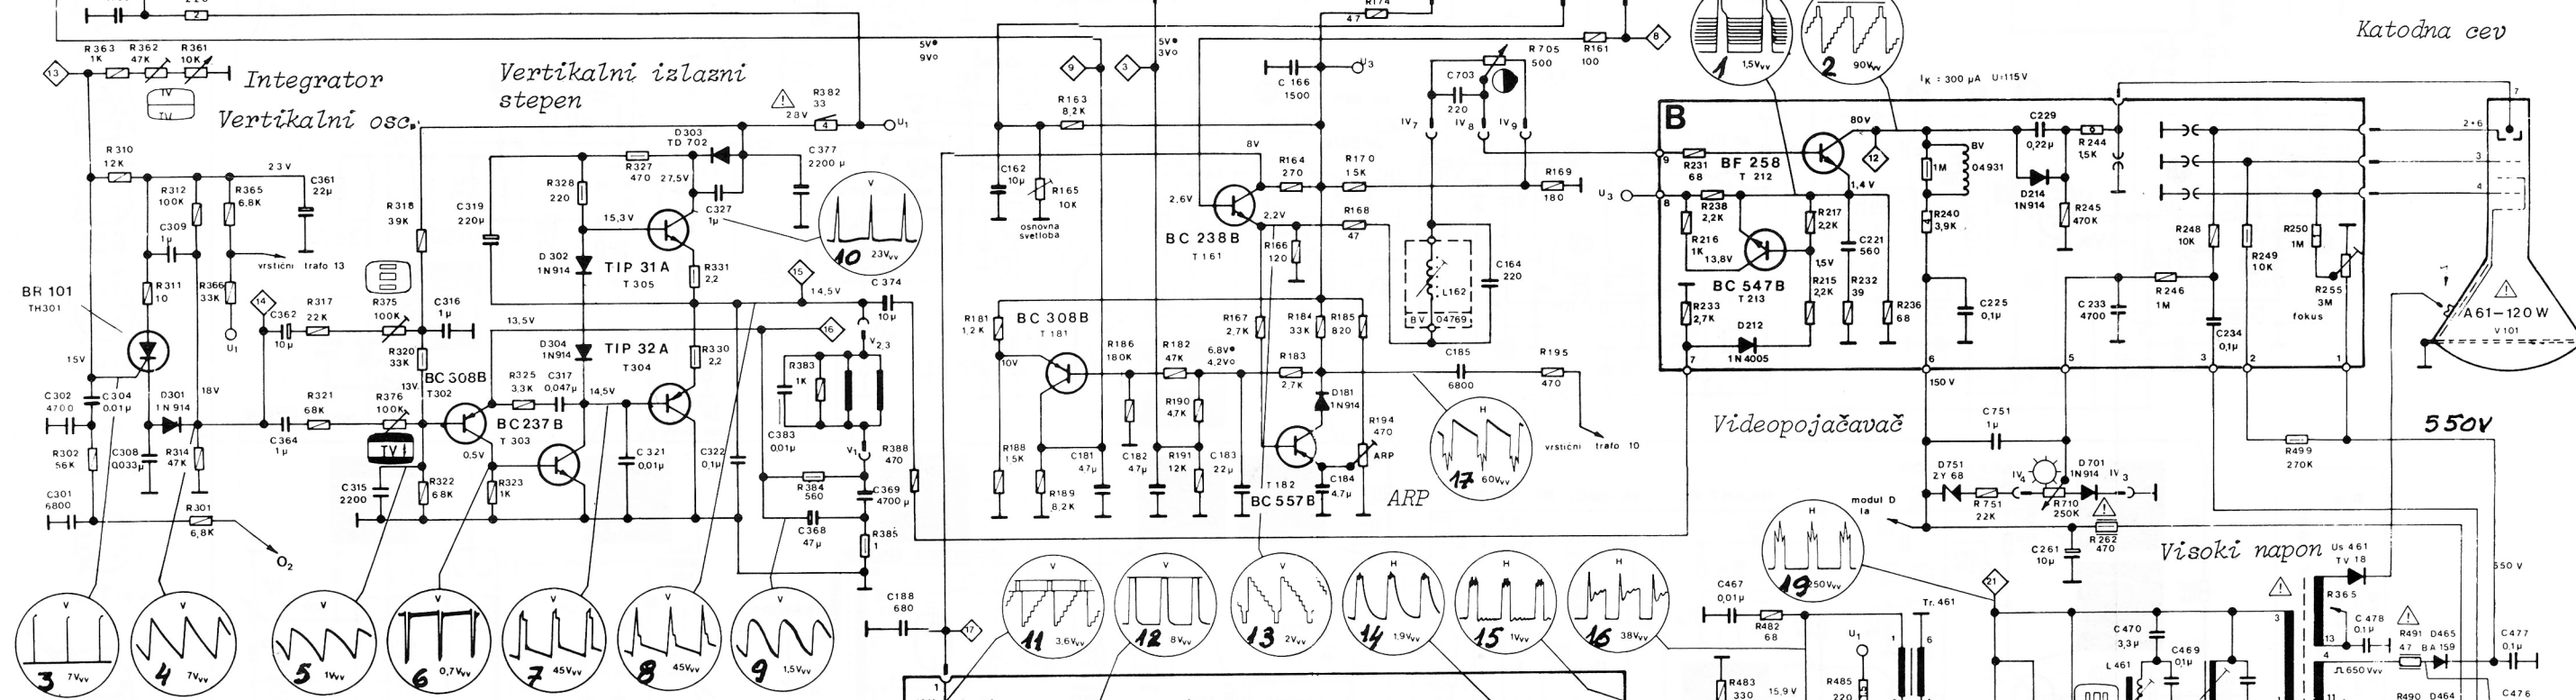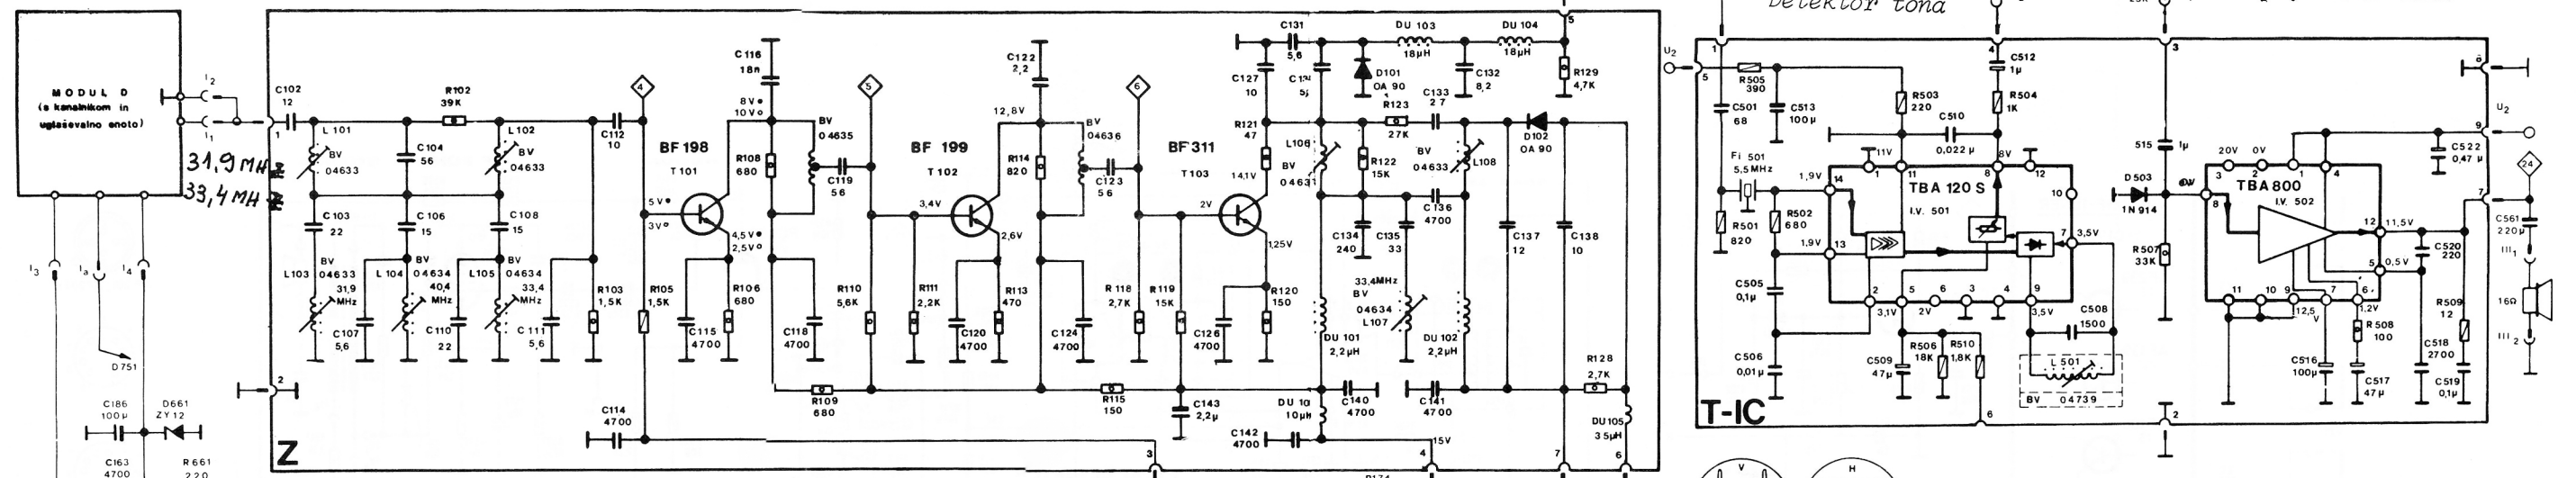


gorenje

TV 104 TOPAZ (69800)
TV 104 TURKIZ (79000)



gorenje

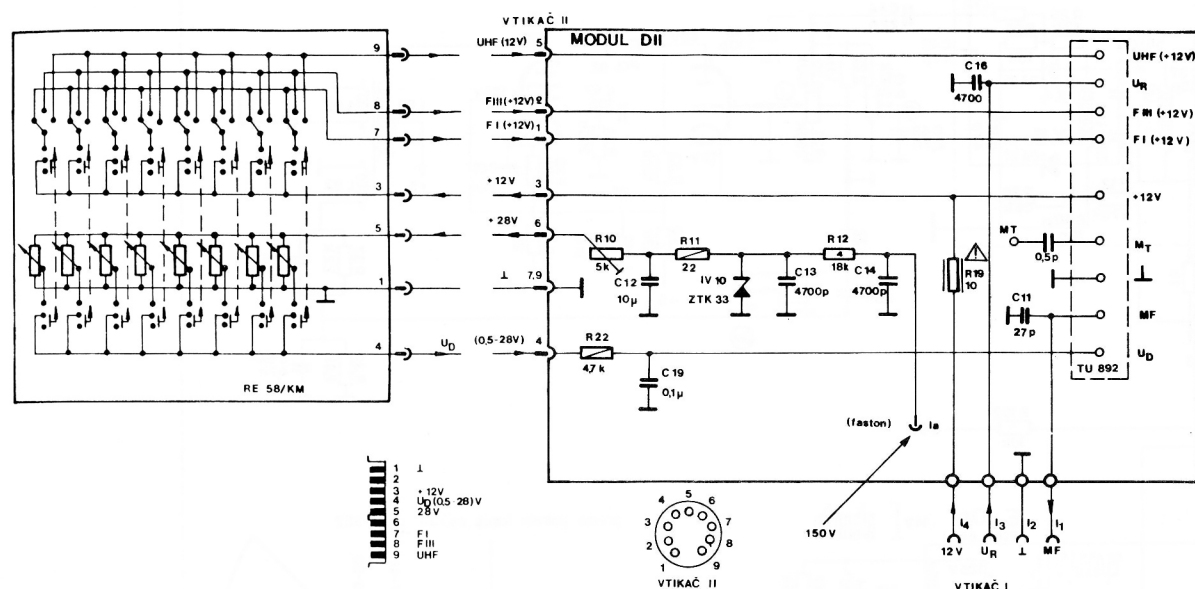

ENOTA UGLAŠEVALNA RE58/KM Z
MODULOM DII ZA TV 104 TURKIZ
<http://orlovac.eu/>

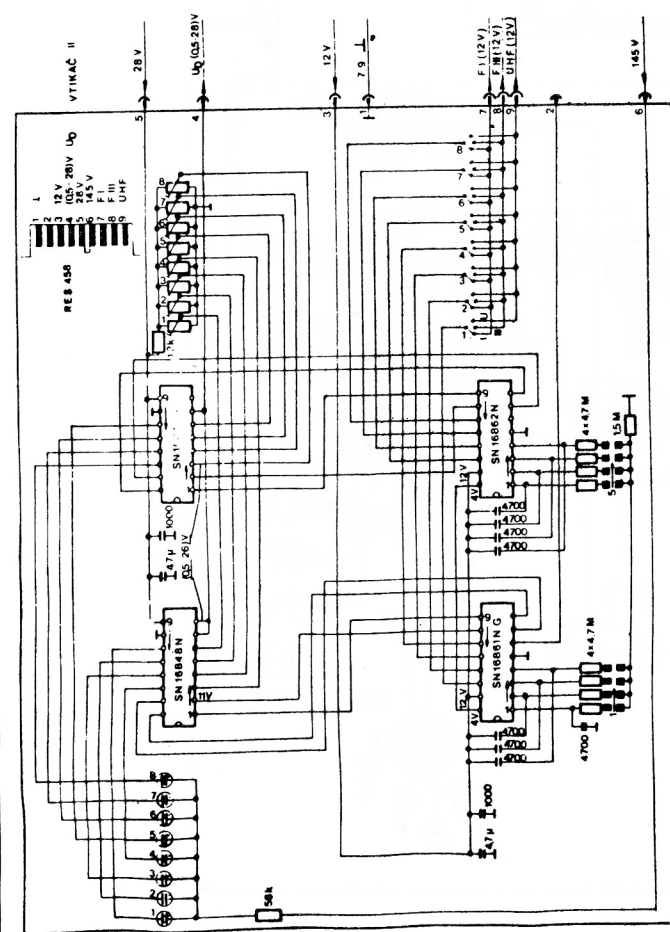

ENOTA UGLAŠEVALNA RES 458 Z
MODULOM DI ZA TV 104 TOPAZ

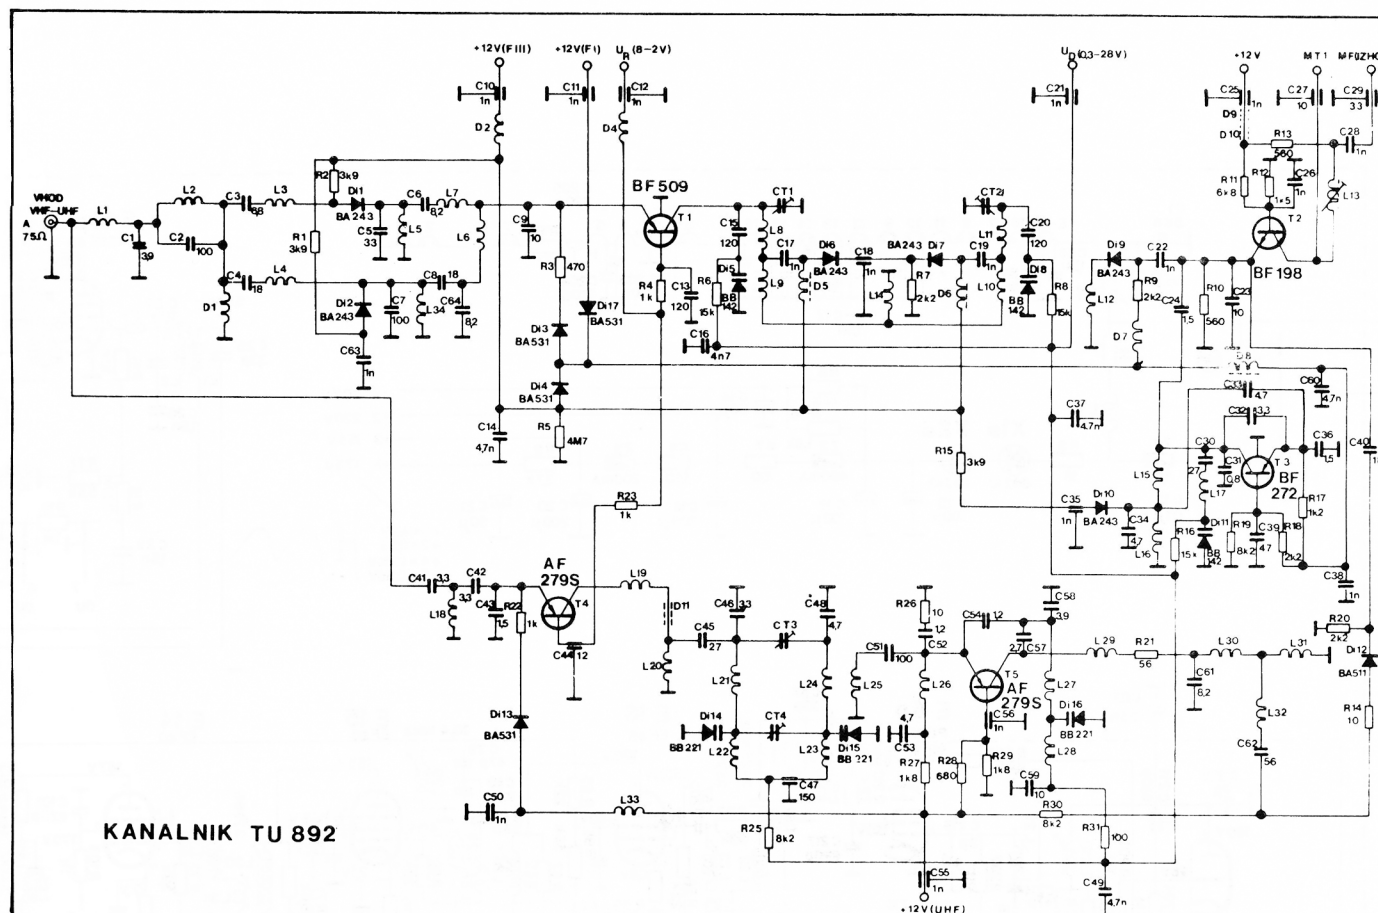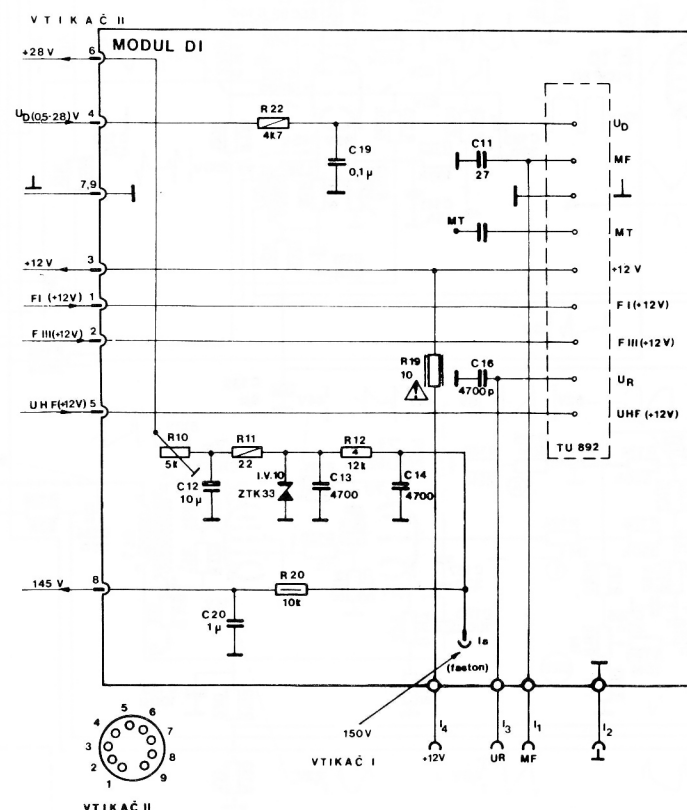

KANALNIK TU 892

SPISEK REZERVNIH DELOV ZA TV 104 TOPAZ IN TURKIZ

Modul O	69777		Poz.	Oznaka	Šifra	Poz.	Oznaka	Šifra	Poz.	Oznaka	Šifra
Platina T-IC	84936								C 476	C/MP/0,1/K/250	69~10
Platina Z	39046								C 478	C/MP/0,1/K/250	77580
Enota uglasovalna RE 58/KM	69782		Va 1	T/0,5A/250V	47158	R 240	R/MSL/3,9k/4	38888	C 505	C/MP/0,1/K/100	53~25
Enota uglasovalna RES 458	78372		Va 2	T/0,5A/250V	47158	R 464	R/MSL/560/1,5	08895	C 506	C/MP/0,01/M/250	17~42
Kanalnik TU 892	65613		Va 3	F/1,25A/250V	69786	R 485	R/MSL/220/1,5	08896	C 508	C/PS/1500p/63	52836
Stikalo z gumbom	69774					R 488	R/MSL/3,3/3	69901	C 510	C/MP/0,022/M/250	52815
Zvočnik	57488					R 661	R/MSL/220/1,5	08896	C 518	C/PS/2700p/63	52917
Trafo vrstični	39252					R 662	R/MSL/150/4	59897	C 519	C/MP/0,1/K/100	53925
Trafo mrežni	57757		R 19	R/SL/VAR/10	79005				C 520	C/PS/220p/63	84935
Gumb potenciometra	83424		R 382	R/VAR/33/4	39298				C 751	C/MP/1/M/250	69~13
Ploščica okrasna za stikalo	69670		R 490	R/SL/VAR/47/0,5	69900						
			R 491	R/SL/VAR/47/0,33	69899						
Poz.	Oznaka	Šifra				R 701	P/VLEČ/LOG/25k	57514	C 143	2,2/35V	4729~
			D 101	OA 90	54532	R 705	P/VLEČ/LIN/500	57543	C 162	10/16V	39~17
I. V. 10	ZTK 33	55576	D 102	OA 90	54532	R 710	P/VLEČ/LIN/250k	49353	C 181	4,7/25V	37~06
I. V. 401	TBA 920	39243	D 181	1 N 914	51666				C 182	1,7/25V	37~06
I. V. 501	TBA 120	83037	D 212	1 N 4005	57752	R 10	P/NA/LIN/5k	53293	C 183	22/16V	37~80
I. V. 562	TBA 800	52821	D 214	1 N 914	51666	R 165	P/NA/LIN/10k	57750	C 184	4,7/20V	5~09
			D 301	1 N 914	51666	R 194	P/NA/LIN/500	39305	C 186	100/40V	69~14
			D 302	1 N 914	51666	R 255	P/VLEČ/LIN/3M	45388	C 261	10/300V	45114
			D 303	TD 702	39242	R 361	P/NA/LIN/10k	69907	C 319	220/16V	39~17
			D 304	1 N 914	51666	R 362	P/NA/LIN/47k	69908	C 361	22/40V	69~15
			us 461	TV 18	49262	R 375	P/NA/LIN/100k	69907	C 362	10/40V	69~16
T 101	T/BF 198	52781	D 463	1 N 914	51666	R 376	P/NA/LIN/100k	69907	C 368	47/40V	69~17
T 102	T/BF 199	47227	D 464	BA 159	39078	R 426	P/NA/LIN/10k	69906	C 369	4700/25V	69~20
T 103	T/BF 311	47228	D 465	BA 159	39079	R 667	P/NA/LIN/500	38992	C 374	10/63V	69~18
T 161	T/BC 238 B	47221	D 503	1 N 914	51666				C 377	2200/40V	69~21
T 181	T/BC 308 B	45020	D 664	1 N 914	51666				C 408	470/160V	69~22
T 182	T/BC 567 B	69789	D 701	1 N 914	51666				C 411	4,7/Spec. 40V	39~16
T 212	T/BF 258	53563							C 509	47/6,3V	83036
T 213	T/BC 547 B	69788				C 19	C/MP/0,1/K/100	53928	C 512	1/3,5V	45042
T 302	T/BC 308 B	45020	D 661	ZY 15	69903	C 20	C/MP/1/K/250	78270	C 513	100/25V	52822
T 303	T/BC 237 B	69794	D 662	ZY 12	59994	C 164	C/PS/600p/160	39016	C 515	1/35V	45042
T 304	T/TIP 32 A	69790	D 663	ZPD 5,6	39093	C 188	C/PS/600p/160	39307	C 516	100/25V	52822
T 305	T/TIP 31 A	69791	D 751	ZY 68	69904	C 225	C/MP/0,1/K/250	69811	C 517	47/16V	52823
T 461	T/BC 847 B	69788				C 229	C/MP/0,22/M/250	49737	C 522	0,47/35V	17201
T 462	T/BC 888/10	69792				C 234	C/MP/0,1/K/250	69810	C 561	220/25V	69~19
T 463	T/BU 406 B	69793				C 309	C/MP/1/K/63	39409	C 661	470/25V	39~19
T 464	T/BC 238 B	47221				C 316	C/MP/1/K/63	39409	C 665	2x2000/63V	39~21
T 465	T/BC 639/10	69792				C 322	C/MP/0,1/K/250	69810	C 668	4,7/35V	81545
T 466	T/BC 639/10	69792				C 327	C/MP/1/K/63	39409	C 670	100/40V	69~14
T 467	T/2 N 3086	57787				C 364	C/MP/1/K/63	39409	C 672	470/25V	39~19
			US 661	B/80/C 2200	39241	C 402	C/PS/1500p/160	39306			
						C 403	C/PS/220p/63	39308			
						C 404	C/PS/33p/160	69908			
T 301	BR 101	39244				C 409	C/PS/600p/160	39016			
						C 410	C/MP/0,22/K/100	39412			
Du 461	130 myH	69787	L 162	Krog zap. 5,5/4,4 mHz	85931	C 415	C/PS/0,01/63	39309			
			L 461	Reg. linearnosti	39254	C 467	C/MP/0,01/H/250	47842			
			L 501	Kr. diskriminatorja	82275	C 471	C/MP/3,3/K/63	39410			

GORENJE